

THE PROCESSLINE SERIES

Loadcell Protection Modules


12-00262

Features

- Easy installation
- Screw terminations


Applications

- Loadcell / Equipment protection

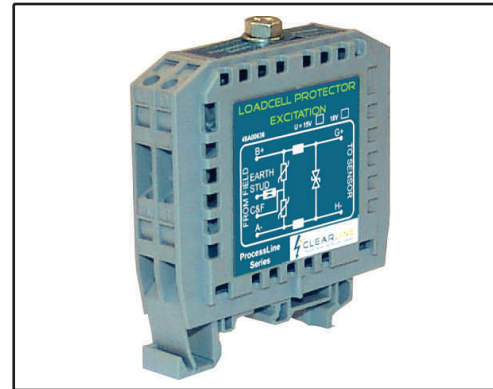

Specifications	
Max operating voltage Vmax Excitation	15V
Max operating current	0.3A
Max discharge current ismax (8/20) (Differential mode)	10kA
Max discharge current ismax (8/20) (Common mode)	10kA
Response time	1ns
Residual voltage - Excitation	<20V
Temperature range	-20°C to +70°C

Dimensions

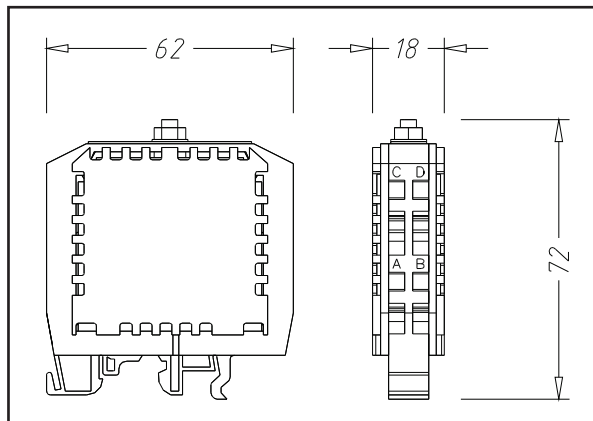

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1111

Fax: +27 (0) 11 314-3880

E-mail: sales@clearline.co.za

www.clearline.co.za



