

THE TELECOMLINE SERIES

Telephone Protector

Features

- Fully graded protection
- Compact design
- High discharge current capability
- Easy installation

An in-line protection device for use with modems, digital communicators, alarm panels, cordless phones and other line equipment. The BT version is suitable for ISDN applications.


12-00309



Specifications

Specifications	
No. of pairs	1
Input connector	Screw terminal
Output connector	Screw terminal
Max operating voltage	+230V DC
Max. discharge current (Differential mode)	10kA
Max. discharge current (Common mode)	10kA
Residual voltage at 5kA (Differential mode)	Approx. 40V
Residual voltage at 5kA (Common mode)	Approx. 100V
Data speed	64kbits/600Ω
Temperature range	-20 C to +70 C

Dimensions

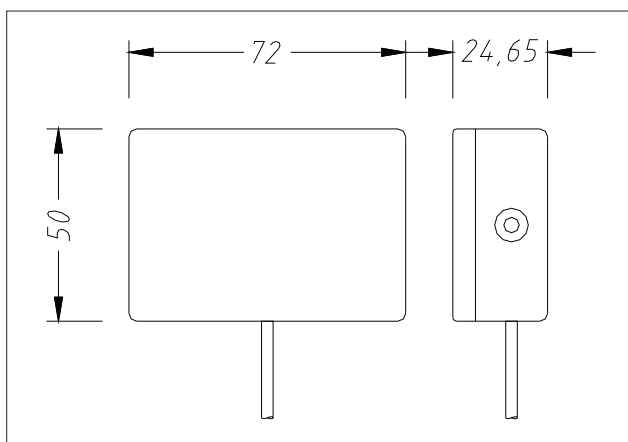

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa

P.O. Box 5985, Halfway House, 1685

Tel: +27 (0) 11 848-1100

Fax: +27 (0) 11 314-3880

E-mail: sales@clearline.co.za

www.clearline.co.za

